



WACO Products, Inc.

1330 Knecht Avenue
Baltimore, MD 21229-5511
sales@wacoproducts.com

Phone: 410-242-1000
Fax: 410-247-4890

Gate Selection Guide Sheet

TYPE OF GATE: SLIDE (sluice)- for drain or isolation upward opening WEIR - for level control downward opening


MATERIAL: aluminum 304 stainless 316 stainless other _____ (or combination)

FRAME TYPE:

self-contained (shown open channel but can have upper seal)

non-self-contained

weir (shown self-contained but can be non-self-contained)

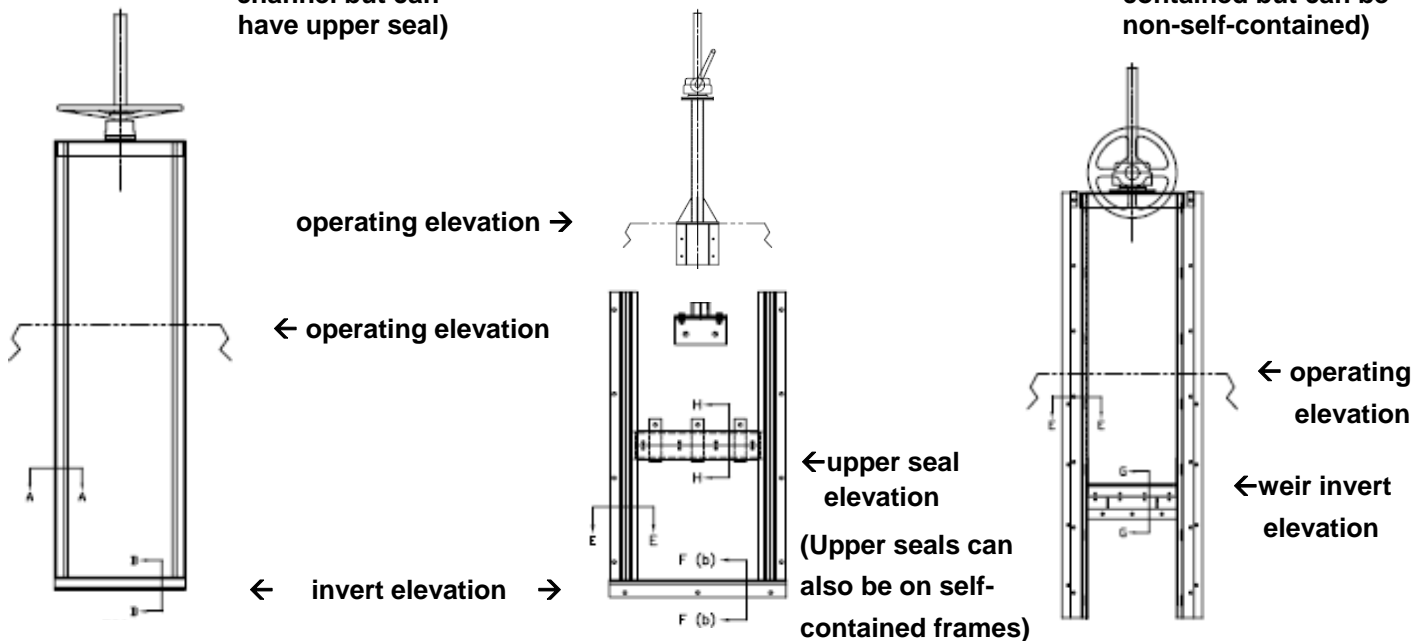

GATE SIZE: _____ width _____ height _____ diameter - *if for pipe*; _____ type _____ pipe end

ELEVATIONS:

_____ operating (TOC) _____ upper seal (optional – for gates over port or pipe openings)

_____ weir invert _____ maximum head (for gates with upper seals)

OPERATOR OPTIONS:

Direct Handwheel Floor Box with 2" AWWA Nut & T-wrench

Bevel Gear Handcrank Bevel Gear Handwheel

Electric – V/P/C _____ / _____ / _____ Cylinder _____ oil _____ water _____ air

STEM OPTIONS:

Rising Stem Non-Rising Stem (consult factory) Stem Guides (if required)

Dual Stems (usually only for gates over 4'0" wide AND width > 2x height)

Stem Cover Geared position indicator (for non-rising stems)

****above info represents most common arrangements - WACO gates can be customized to suit any requirement****

NOTES:

Sketch or drawing attached Specification attached